




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1693	MHz
Upper Frequency:	1850			MHz
Tuning Voltage:	0.5		15.0	VDC
Supply Voltage:	7.6	8.0	8.4	VDC
Output Power:	-6.0	-4.0	-2.0	dBm
Supply Current:		15	25	mA
Harmonic Suppression (2 <sup>nd</sup> Harmonic)		-15	-10	dBc
Pushing:		0.5		MHz/V
Pulling, all Phases:		1.0		MHz pk-pk
Tuning Sensitivity:		25		MHz/V
Phase Noise @ 10kHz offset:		-103	-100	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			47	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C

FRONT

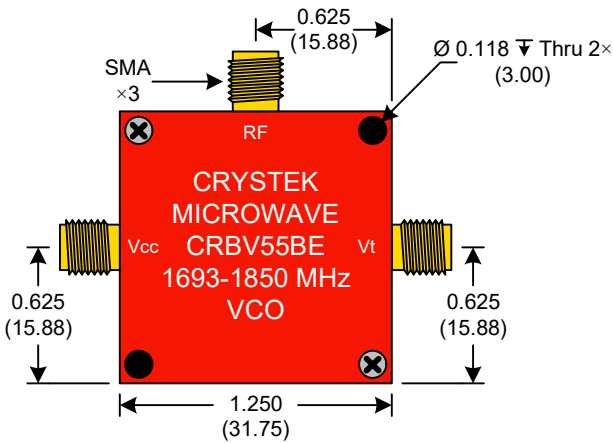

BACK



SIDE



● Unless otherwise specified, Dimensions are in:  $\frac{IN}{(mm)}$




Proper ESD precautions should be taken to avoid performance degradation or loss of functionality.


**Product Control:**

Crystek Part Number:	CRBV55BE-1693-1850	Release Date:	29-Jan-2026
Revision Level:	C	Responsible:	C. Vales

Phase Noise (1 Hz BW, Typical)

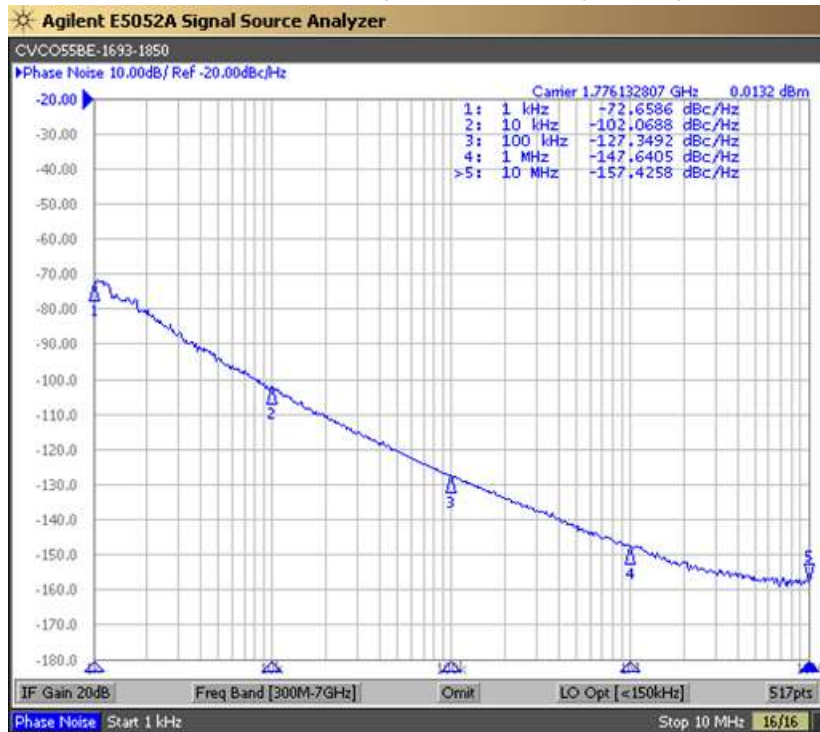

Tuning Curve (Typical)

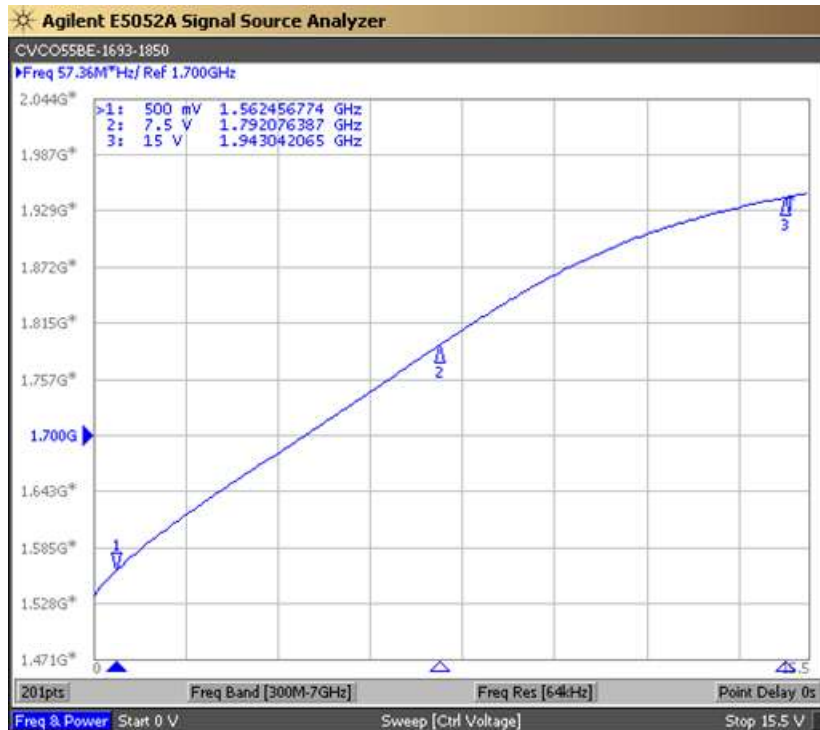

**Product Control:**

Crystek Part Number:	CRBV55BE-1693-1850	Release Date:	29-Jan-2026
Revision Level:	C	Responsible:	C. Vales

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.