




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			1935	MHz
Upper Frequency:	2235			MHz
Tuning Voltage:	0.5		9.5	VDC
Supply Voltage:	9.5	10.0	10.5	VDC
Output Power:	+6.0	+8.5	+11.0	dBm
Supply Current:		25		mA
Harmonic Suppression (2 nd Harmonic)		-10		dBc
Pushing:		0.5	2.0	MHz/V
Pulling, all Phases:		2.5	5.0	MHz pk-pk
Tuning Sensitivity:		50		MHz/V
Phase Noise @ 10kHz offset:		-101		dBc/Hz
Phase Noise @ 100kHz offset:		-121		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			50	pF
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-45		+90	$^{\circ}\text{C}$

FRONT

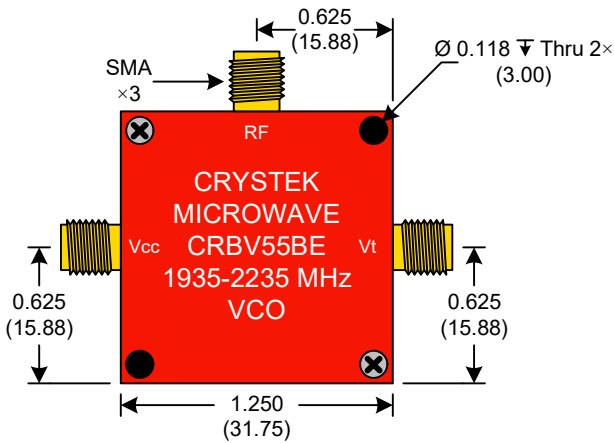

BACK



SIDE



● Unless otherwise specified, Dimensions are in: $\frac{\text{IN}}{(\text{mm})}$




Proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Product Control:


Crystek Part Number:	CRBV55BE-1935-2235	Release Date:	19-Feb-2026
Revision Level:	C	Responsible:	C. Vales



Phase Noise (1 Hz BW, Typical)

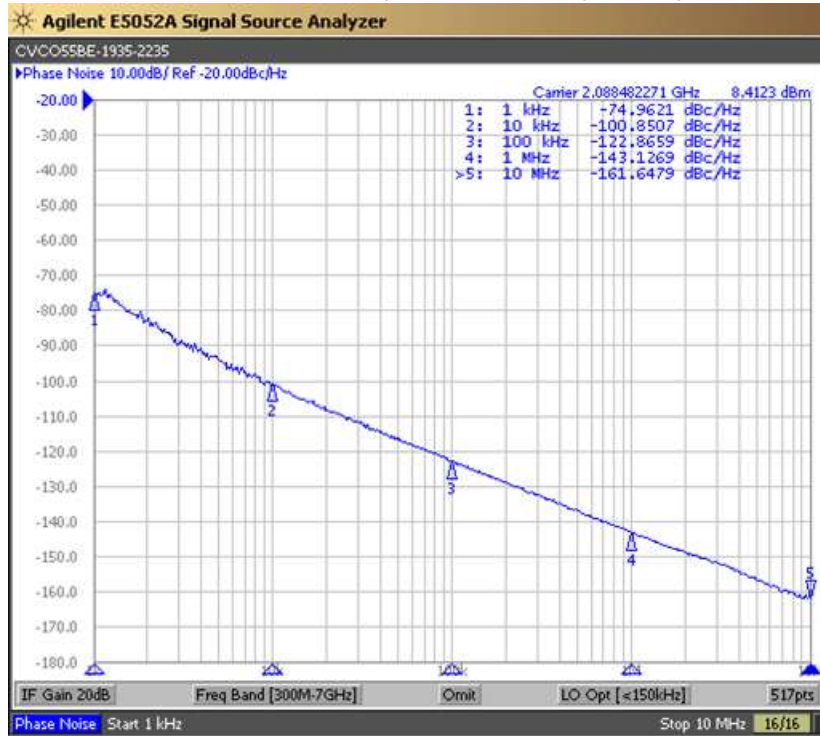

Tuning Curve (Typical)

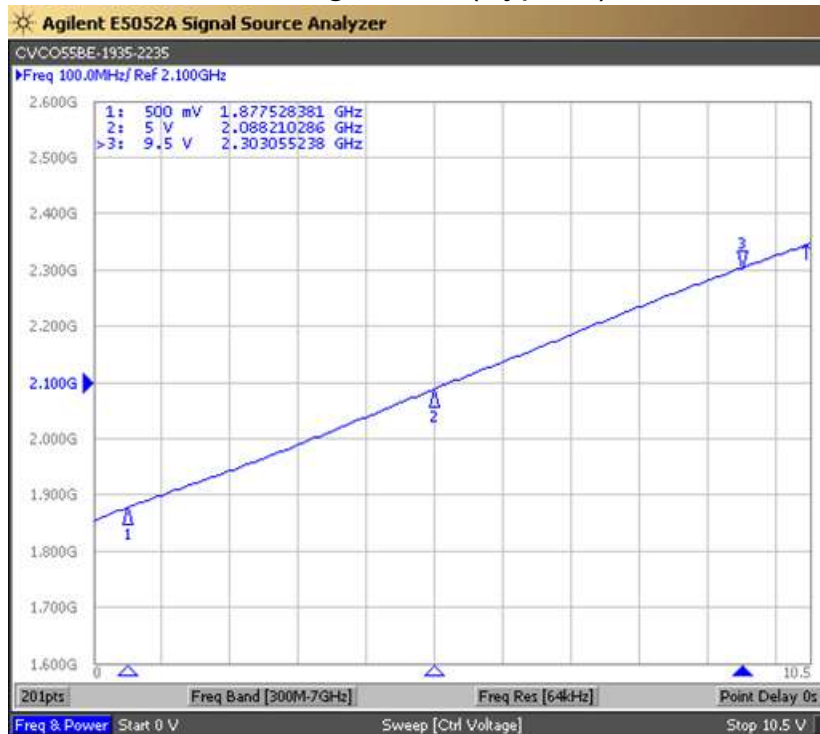

Product Control:

Crystek Part Number:	CRBV55BE-1935-2235	Release Date:	19-Feb-2026
Revision Level:	C	Responsible:	C. Vales

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.

